



A Skellerup Industries Company

Dektite® Mini & Micro



Deks Mini Range is designed
for the smallest of penetrations

CHECK THE BENEFITS!

- ✓ Small base area
New Micro Dektite® is just 7cm²
- ✓ Proven design
Associated with the roofing industry globally for over 40 years
- ✓ Designed for perfect sealing
Base designed to give silicone the perfect long time grip
- ✓ Paintable
With 100% High Gloss Acrylic Paint
- ✓ Twenty year warranty
Just fit it and forget it – we've got you covered



FS 520679
QUALITY ISO9001

www.deks.com.au

EASY SELECTION GUIDE

DEKTITE MINI RANGE BLACK & GREY EPDM OR RED SILICONE

ORIGINAL ROUND BASE DEKTITE

Product code	Pipe external	Pipe external	Roof pitch	
DF100	0-35mm	0-1½"	0-45° or 12/12	} Grey (EPDM)* Red Silicone
DF101	5-65mm	¼ - 2½"	0-40° or 10/12	
DF102	45-80mm	1¾ - 3¼"	0-40° or 10/12	

PREMIUM SQUARE BASE DEKITE


Code No	Pipe mm	Pipe inch	Base mm	Inches	Pitch	Colours
DFE 0-20	0-20mm	0-¾"	70 X 70	2¾"	0-60° or 18/12	} Black (EPDM)* Grey (EPDM)* Red Silicone
DFE 0-35	0-35mm	0-1⅜"	99 X 99	39"	0-60° or 18/12	
DFE 5-55	5-55mm	¼ - 2⅛"	137 X 137	54"	0-45° or 12/12	
DFE 5-120	5-120mm	¼ - 4¾"	218 X 218	85 ¾"	0-45° or 12/12	

Available in Black and Grey EPDM or Red Silicone

EPDM will withstand constant temperatures at the roofline of -50°C (-122°F) to 115°C (239°F) & up to 150°C (302°F) intermittently.

Red Silicone will withstand constant temperatures at the roofline of -50°C (-112°F) to 200°C (392°F) & up to 250°C (482°F) intermittently.

For higher temperatures always use the Dektite® Silicone range.
Go to www.deks.com.au for more information on the full range.

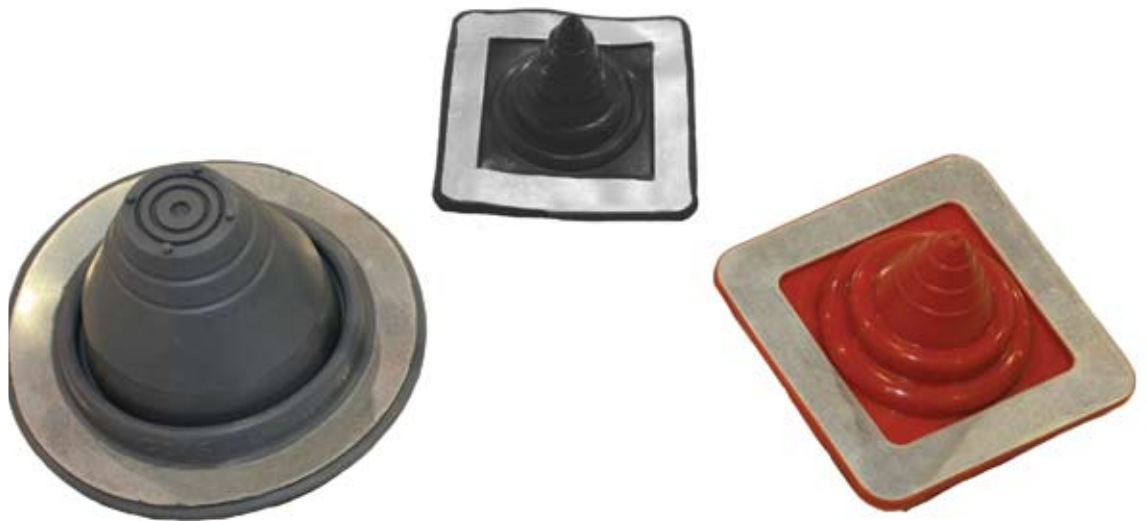

Need to flash a larger penetration? Contact DEKS to discuss the tile roof flashing range.