



DEKS Stainless Steel Repair Clamps For High Pressure Pipes

Quality Options for Quick or Permanent Pipe Repairs

- Durable Repair Options for Cracked, Damaged, Split, and Leaking Water Pipes;
- Manufactured from 316 Stainless Steel for Corrosion Resistance;
- Nitrile Rubber Gasket Watertight Seal Approved for Potable Water;
- Full 360° Seal Around the Pipe;
- Designed for Quick, Economical Repair of Water Mains - Saves Replacing Entire Sections of Pipe;
- Available in sizes ranging from DN 80 to DN 300.

- ✓ **Quick Installation** - Minimises down-time for damaged water pipes and pressurised mains;
- ✓ **Durable Materials** - Corrosion-resistant 316 stainless steel with full circle nitrile rubber gasket approved for potable water;
- ✓ **Versatile Fittings** - Sophisticated design ensures that each size can securely seal a range of pipe sizes and materials;
- ✓ **Economical** — Faster and more cost effective than replacing entire sections of pipe;
- ✓ **Long-lasting Solution** - Where existing pipe is in good condition apart from the affected section;
- ✓ **Approvals & Specifications** - WSAA Appraisal; 1600kpa Pressure Rating (approved for watermains); Tested to AS/NZ 4181 standard; IAPMO OCEANA Cert. OMK30043;
- ✓ **DEKS Responsive Service** and Quality Product Range.




Selection Guide

DEKS Code	Bolts	Length (mm)	Size Range (mm)	Ductile Iron	Mild Steel	Galvin-ised Iron	ABS	GRP	Cast Iron Class B	Cast Iron Class C	Asbestos	Rein-forced Concrete	PVC Series 1	PVC Series 2
DRC80	2-M16	200	89-99	✓			✓		✓	✓	✓		✓	
DRC100	2-M16	200	114-124	✓	✓	✓			✓	✓	✓			
DRC100L	4-M16	300	114-124	✓	✓	✓			✓	✓	✓			
DRC150S1	2-M16	200	160-170		✓	✓	✓						✓	
DRC150S2	2-M16	200	177-187	✓				✓	✓	✓	✓			✓
DRC150S1L	4-M16	300	160-170		✓	✓	✓						✓	
DRC150S2L	4-M16	300	177-187	✓				✓	✓	✓	✓			✓
DRC200S1	3-M16	200	225-230				✓						✓	
DRC200S2	3-M16	200	232-242	✓				✓	✓	✓	✓			✓
DRC225S1	4-M16	300	250-255				✓	✓					✓	
DRC225S2	4-M16	300	259-269	✓				✓	✓	✓	✓			✓
DRC250	4-M20	300	280-290	✓					✓	✓	✓			
DRC300S1	4-M20	300	315-325		✓		✓						✓	
DRC300S2	4-M20	300	345-355	✓				✓		✓	✓	✓		✓

DEKS Copper Repair Clamps For Regular Pipes

- Proven Long-Term Reliability;
- Full 360° Nitrile Rubber Gasket Seal Around the Pipe;
- Pressure Rating of 1600kpa;
- Sizes to Fit 15-50mm Pipes.

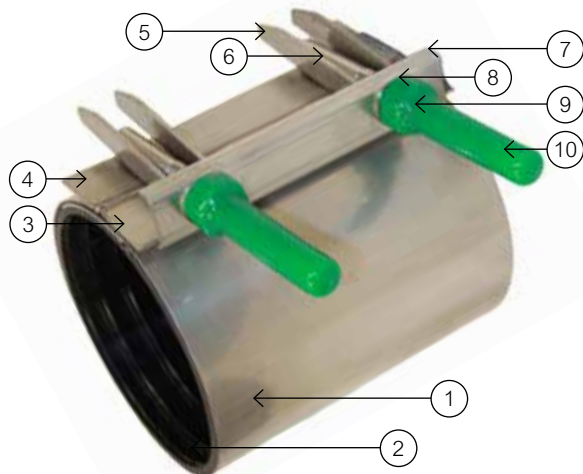

Components

S. No.	Part
1	Skin
2	Sealing Gasket
3	Bridge Plate
4	Junction Plate
5	Lugs
6	Stainless Steel Stud
7	Locking Plate
8	Washer
9	Nut
10	Protective Plate

Applications

